





Similar Image


Duo 5 MC, 1-phase motor, 95-120 V, 50 Hz; 105-120 V, 60 Hz

- Dual-stage, high-performance rotary vane pump with a pumping speed of up to 6 m³/h
- With Single-phase motor
- Integrated gas ballast and HV safety valve
- For all low and medium vacuum applications
- Corrosive gas version, magnetically coupled
- Special feature: Various motor voltages for worldwide employment


M = Magnetically coupled

MC = Corrosive gas version, magnetically coupled

TF = Temperature sensor

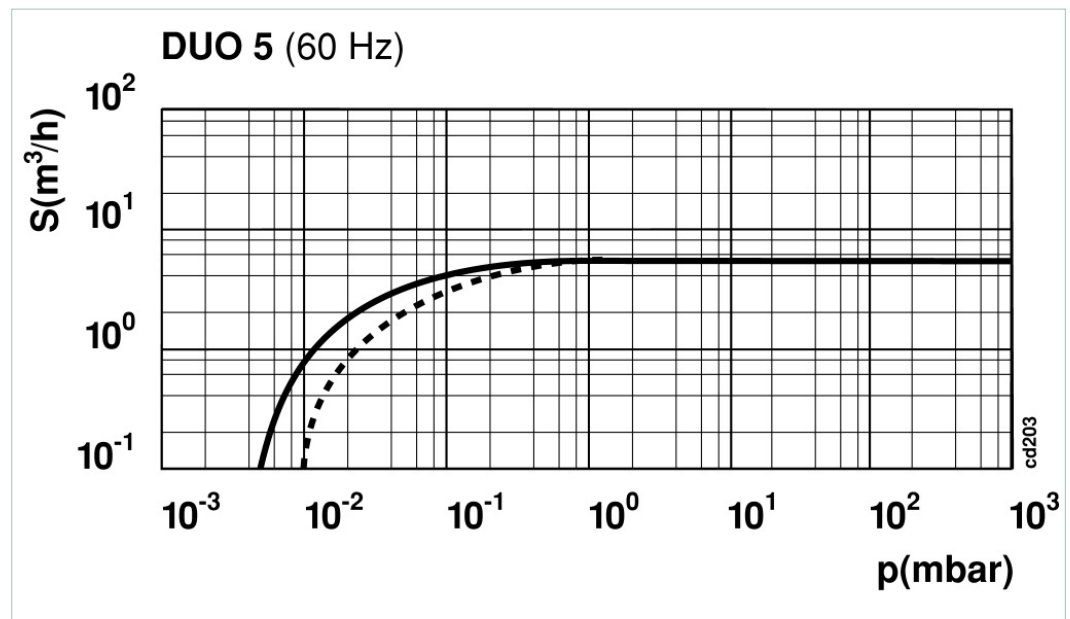

Dimensions

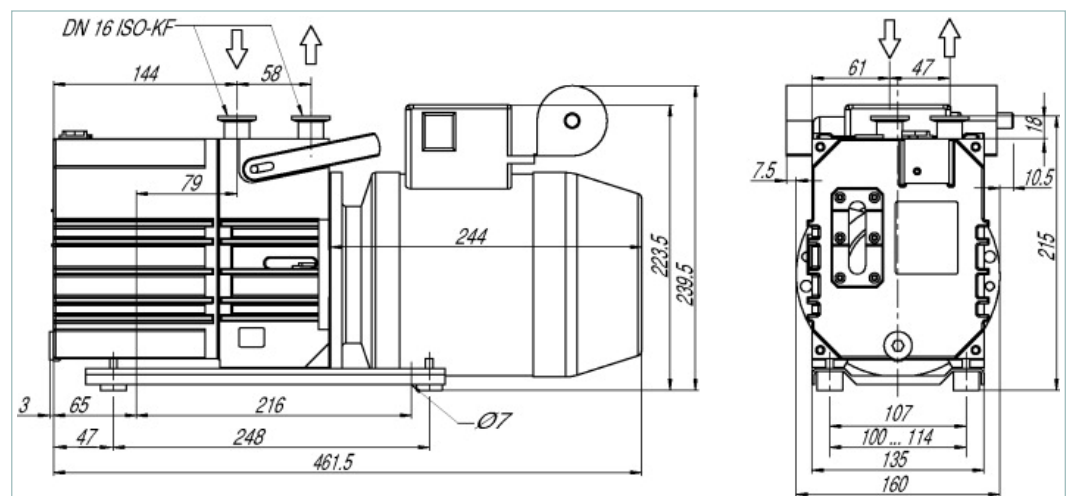

Technical Data

Duo 5 MC, 1-phase motor, 95-120 V, 50 Hz;
105-120 V, 60 Hz

Ambient temperature

12-40 °C | 53.6-104 °F | 285-313 K

Cooling method, standard

Air

Technical Data	Duo 5 MC, 1-phase motor, 95-120 V, 50 Hz; 105-120 V, 60 Hz
Corrosive gas version	yes
Emission sound pressure level without gas ballast at 50 Hz	≤ 57 dB (A)
Exhaust pressure, max.	1,500 hPa 1,125 Torr 1,500 mbar
Exhaust pressure, min.	250 hPa 187.5 Torr 250 mbar
Flange (in)	DN 16 ISO-KF
Flange (out)	DN 16 ISO-KF
Leak rate magnetic coupling	≤ 1 · 10 ⁻⁶ Pa m ³ /s ≤ 7.5 · 10 ⁻⁶ Torr l/s ≤ 1 · 10 ⁻⁵ mbar l/s
Leak rate safety valve	≤ 1 · 10 ⁻⁵ Pa m ³ /s ≤ 7.5 · 10 ⁻⁵ Torr l/s ≤ 1 · 10 ⁻⁴ mbar l/s
Mains cable	yes
Mains requirement: voltage 50 Hz	95-120 (± 5 %) V
Mains requirement: voltage 60 Hz	105-120 (± 5 %) V
Motor version	1-phase Motor
Operating fluid	F4
Operating fluid filling	0.75 l
Protection category	IP 55
Pumping speed at 50 Hz	5 m ³ /h
Pumping speed at 60 Hz	6 m ³ /h
Rated power 50 Hz	0.37 kW
Rated power 60 Hz	0.37 kW
Rotation speed at 50 Hz	1500 min ⁻¹
Rotation speed at 60 Hz	1800 min ⁻¹
Switch	yes
Ultimate pressure with gas ballast	7 · 10 ⁻³ hPa 5.25 · 10 ⁻³ Torr 7 · 10 ⁻³ mbar
Ultimate pressure without gas ballast	4 · 10 ⁻³ hPa 3 · 10 ⁻³ Torr 4 · 10 ⁻³ mbar
Weight	25 kg 55.12 lb

Typical ultimate pressure according to PNEUROP

Order number

Duo 5 M **PK D61 727**

Accessories

Accessories	
Oil return unit from ONF 25 M, 25 L, 25 XL	PK 196 177 -T
ONF 025 C, oil mist filter, corrosive gas version up to 24 m ³ /h	PK Z40 406
Accessories UnoLine	
Oil pressure switch for Duo 5/10/20 M and Penta 20/35	PK 196 484 -T
Operations monitoring unit 1 for Duo 1.6/3/6/11 and Duo 5/10/20 M	PK 196 157 -T
Operations monitoring unit 2 for Duo 1.6/3/6/11 and Duo 5/10/20 M	PK 196 142 -T
Operations monitoring unit 3 for Duo 1.6/3/6/11 and Duo 5/10/20 M	PK 196 141 -T
Accessories UnoLine Plus	
PTC-resistor tripping device	P 4768 051 FQ
Consumables	
F4, Perfluoropolyether, 0.25 l	PK 005 885 -T
F4, Perfluoropolyether, 0.5 l	PK 005 886 -T
F4, Perfluoropolyether, 1 l	PK 005 887 -T