



Duo 125/M

Dual-stage rotary vane pumps with a pumping speed up to 135 m³/h:






Similar Image

Duo 125 M, 3-phase motor, 3TF, 230/400 V, 50 Hz; 265/460 V, 60 Hz


- Dual-stage, high-performance rotary vane pump with a pumping speed up to 135 m³/h
- With 3-phase motor and magnetic coupling
- With temperature sensor (3TF) for optimum motor protection
- Integrated gas ballast and HV safety valve
- For all low and medium vacuum applications
- Special feature: Various motor voltages for wide application field
- Other motor voltages available on request

TF = Temperature sensor

M = Magnetic coupling

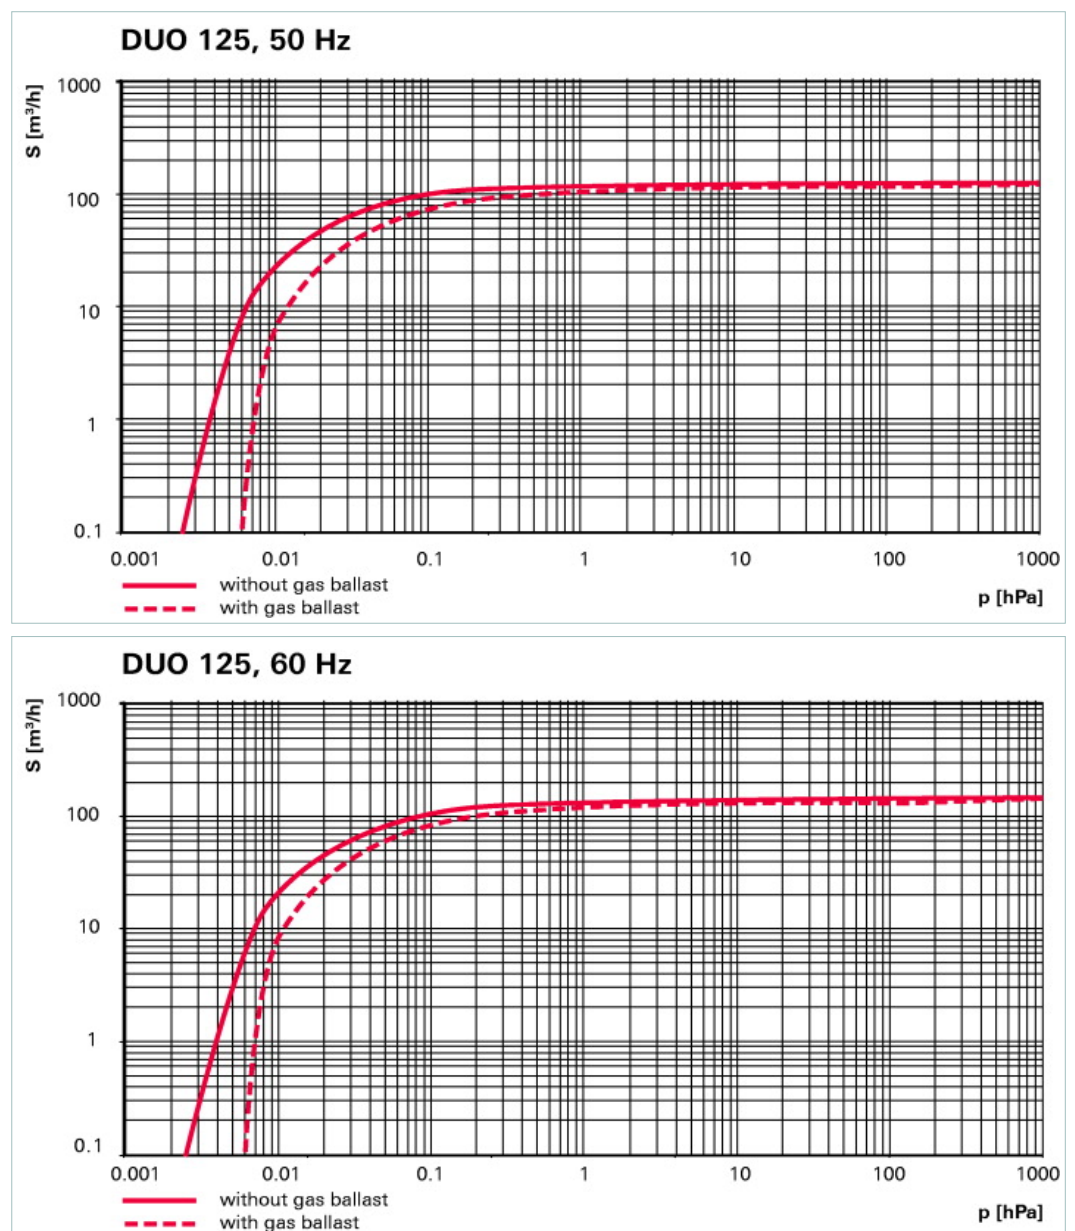

Dimensions

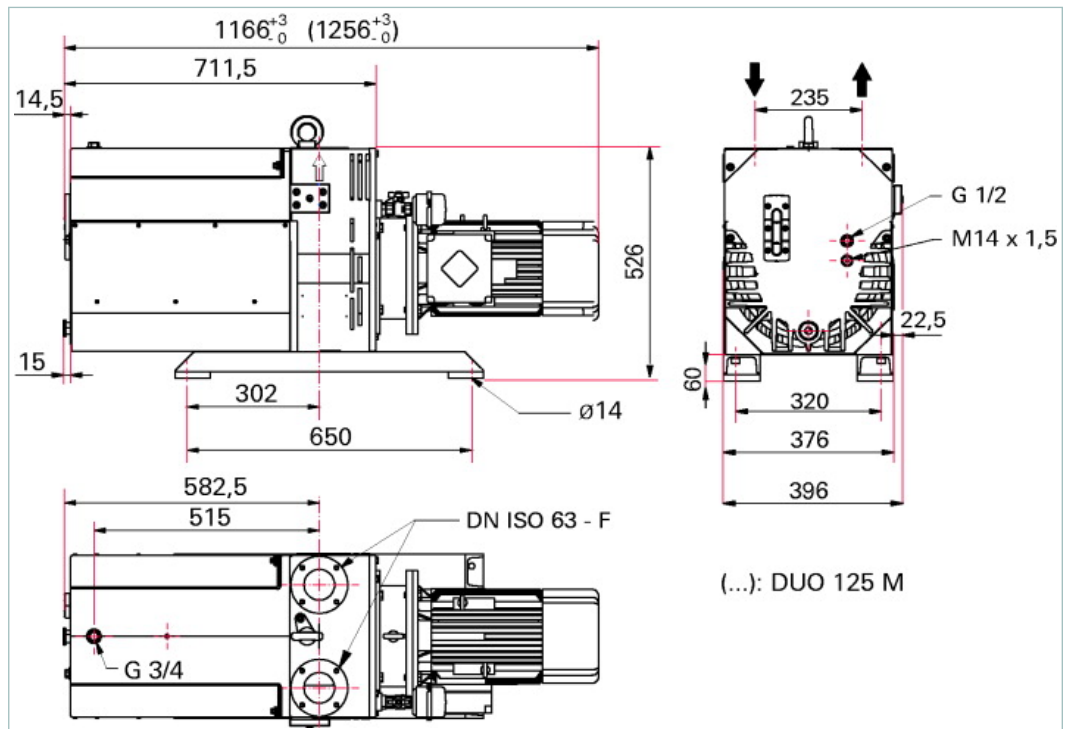

Technical Data	Duo 125 M, 3-phase motor, 3TF, 230/400 V, 50 Hz; 265/460 V, 60 Hz
Ambient temperature	12-40 °C 53.6-104 °F 285-313 K
Cooling method, standard	Air
Emission sound pressure level without gas ballast at 50 Hz	≤ 75 dB (A)
Exhaust pressure, max.	1,500 hPa 1,125 Torr 1,500 mbar
Exhaust pressure, min.	250 hPa 187.5 Torr 250 mbar
Flange (in)	DN 63 ISO-F
Flange (out)	DN 63 ISO-F
Leak rate magnetic coupling	≤ 1 · 10 ⁻⁷ Pa m ³ /s ≤ 7.5 · 10 ⁻⁷ Torr l/s ≤ 1 · 10 ⁻⁶ mbar l/s
Leak rate safety valve	≤ 1 · 10 ⁻⁵ Pa m ³ /s ≤ 7.5 · 10 ⁻⁵ Torr l/s ≤ 1 · 10 ⁻⁴ mbar l/s
Magnetic coupling	yes
Mains requirement: voltage 50 Hz	230/400 V
Mains requirement: voltage 60 Hz	265/460 V
Motor protection	3TF
Motor version	3-phase Motor
Operating fluid	P3
Operating fluid filling	14 l
Protection category	IP 55
Pumping speed at 50 Hz	115 m ³ /h
Pumping speed at 60 Hz	135 m ³ /h
Rated power 50 Hz	4.0 kW
Rated power 60 Hz	4.5 kW
Rotation speed at 50 Hz	1000 min ⁻¹
Rotation speed at 60 Hz	1200 min ⁻¹
Ultimate pressure with gas ballast	4 · 10 ⁻³ hPa 3 · 10 ⁻³ Torr 4 · 10 ⁻³ mbar
Ultimate pressure without gas ballast	2 · 10 ⁻³ hPa 1.5 · 10 ⁻³ Torr 2 · 10 ⁻³ mbar
Weight	245 kg 540.13 lb

Typical ultimate pressure according to PNEUROP

Order number	
Duo 125/M	PK D47 152

Accessories	
Accessories	
KAS 63, condensate separator for pumping speeds up to 250 m ³ /h	PK Z10 010
KLF 063, cold trap	PK Z80 010
OFM 125, mechanical oil filter	PK Z90 340
Oil pressure switch for Duo 125/255	PK 223 806 -T
ONF 63, oil mist filter for pumping speeds of up to 135 m ³ /h	PK Z40 010
Operating fluid level monitoring	PK 006 001 -T
Operations monitoring unit 3 for Duo 35/65, Duo 125/255	PK 223 739 -U
Temperature sensor for operating fluid	PK 006 040 -T
ZFO 063, zeolite trap	PK Z70 010
Accessories HenaLine	
SAS 63 dust separator, DN 63 ISO-K, polyester filter	PK Z60 511
Accessories UnoLine Plus	
FAK 063, activated carbon filter	PK Z30 010
Oil return unit, ORF 005, standard version	PK Z90 065
PTC-resistor tripping device	P 4768 051 FQ
Consumables	
P3, mineral oil, 1 l	PK 001 106 -T
P3, mineral oil, 5 l	PK 001 107 -T
P3, mineral oil, 20 l	PK 001 108 -T