



CMR 374, 1 hPa F.S., DN 16 ISO-KF



 伯東
Hakuto

PFEIFFER VACUUM




Similar Image

CMR 374, 1 hPa F.S., DN 16 ISO-KF

- Precise pressure measurement independent of type of gas
- Measurement range up to four decades
- Gauge for connection to TPG
- Measurement range from $1 \cdot 10^{-4}$ to 1.1 hPa
- Excellent zero stability
- Sensor in ceramic technology
- No memory effects
- Materials employed have identical temperature coefficients
- Outstanding long-term and temperature stability
- Additional protection against pollution by sensor shield
- Calibration test report included in delivery

Dimensions

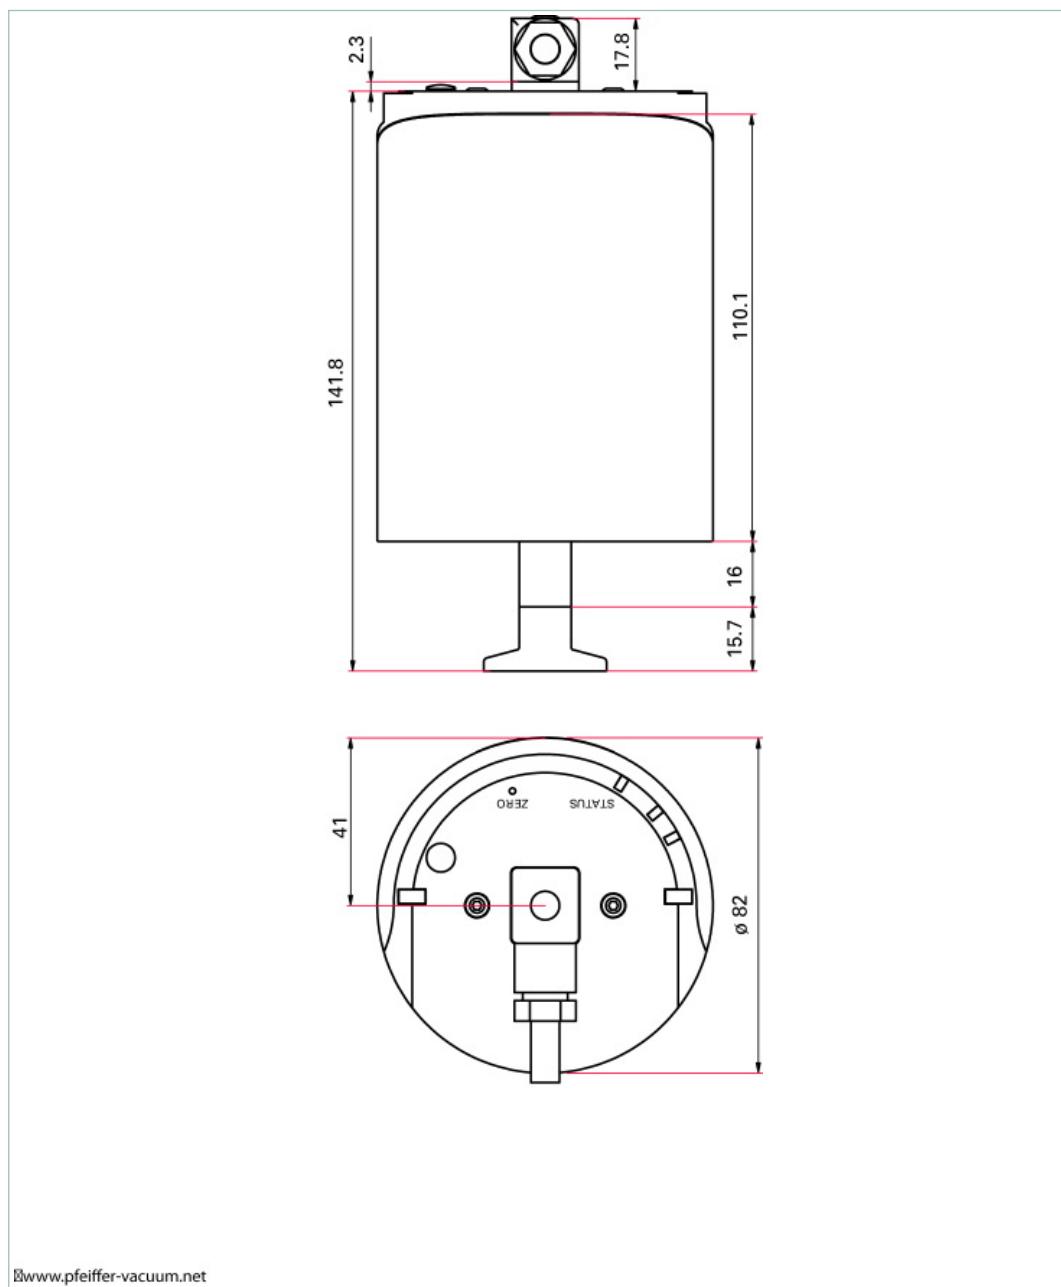

www.pfeiffer-vacuum.net

Technical Data		CMR 374, 1 hPa F.S., DN 16 ISO-KF
Accuracy	0.15	
Accuracy: % of measurement	0,15	
Bakeout temperature max. at the flange	$\leq 110 \text{ }^{\circ}\text{C}$ $\leq 230 \text{ }^{\circ}\text{F}$ $\leq 383 \text{ K}$	
Full Scale	1 hPa 0.75 Torr 1 mbar	
Measurement range max.	1.1 hPa 0.82 Torr 1.1 mbar	
Measurement range min.	$1 \cdot 10^{-4} \text{ hPa}$ $7.5 \cdot 10^{-5} \text{ Torr}$ $1 \cdot 10^{-4} \text{ mbar}$	
Membrane and measuring chamber	Ceramics (Al_2O_3 99.5 %)	
Method of measurement	Capacitance	
Nominal diameter	DN 16 ISO-KF	
Output signal: Minimum load	> 10 kΩ	
Output signal: Pressure range	1 - 9.8 V	
Output signal: Sensor error above	> 9.8 V	
Output signal: Sensor error below	< 0.4 V	
Pipe and flange	Stainless steel	
Pressure max.	2,000 hPa 1,500 Torr 2,000 mbar	
Protection category	IP40	
Resolution	0.003 % F.S.	
Response time	30 ms	
Supply: Power consumption max.	$\leq 12 \text{ W}$	
Supply: Voltage	14-30 V DC	
Temperature: Operating	10-40 °C 50-104 °F 283-313 K	
Temperature: Storage	-40-65 °C -40-149 °F 233-338 K	
Temperature effect: on span	0.01 % of reading/°C	
Temperature effect: on zero	0.0025 % F.S./°C	
Temperature stabilization	45 °C 113 °F 318 K	
Volume	$\leq 4.2 \text{ cm}^3$	
Weight	$\leq 900 \text{ g}$	

Order number	
CMR 374	PT R25 131

Accessories	
Accessory for ActiveLine gauges and controllers	
Mating connector	B 4707 283 MA
Sensor cable, 3 m	PT 448 250 -T
Vacuum accessories	
Centering ring with metal mesh-fine filter, pore size 4 m, FPM/stainless steel	PT 120 132 -T
Centering ring with poral filter, pore size 20 m, FPM/stainless steel	PF 117 216 -T