



ACP 15







Similar Image

# **ACP 15, Standard, three phase, permanent gas ballast**

All possible order number combinations are described on the order matrix available in the ACP brochure, please consult it.

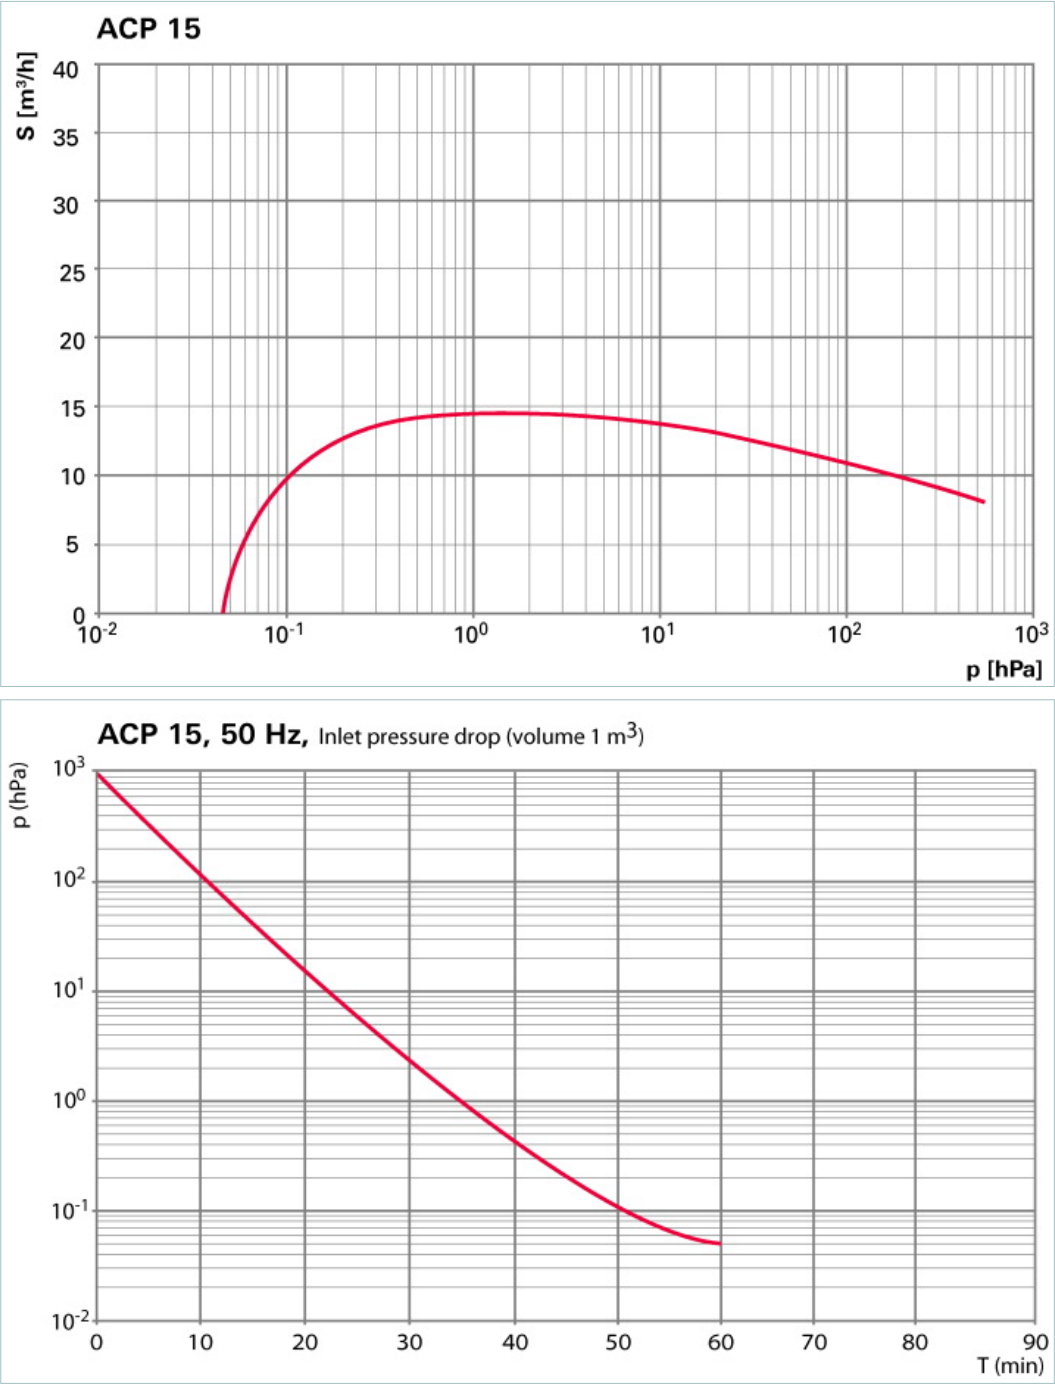

## Dimensions

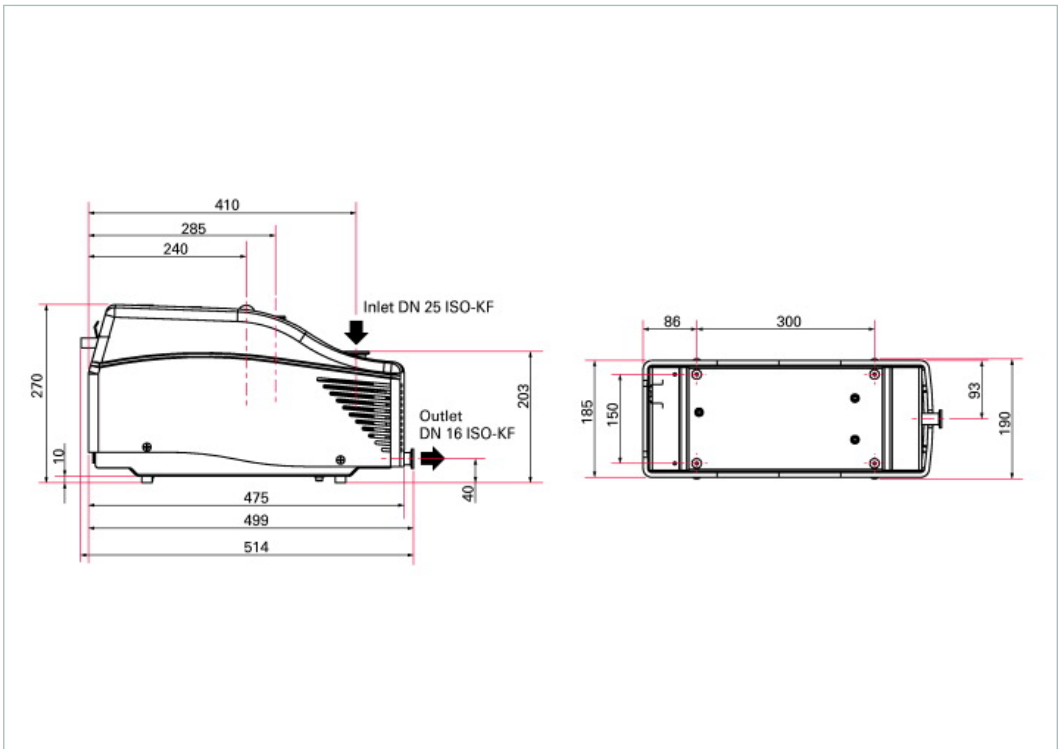

Technical Data	ACP 15, Standard, three phase, permanent gas ballast
Ambient temperature	12-40 °C   53.6-104 °F   285-313 K
Continuous inlet pressure, max.	1,013 hPa   759.75 Torr   1,013 mbar
Cooling	Air
Dimensions (L x W x H)	497 x 190 x 266 mm   19.57 x 7.48 x 10.47 inch
Flange (in)	DN 25 ISO-KF
Flange (out)	DN 16 ISO-KF
Helium leak rate, max.	5 · 10 <sup>-8</sup> Pa m <sup>3</sup> /s   3.75 · 10 <sup>-7</sup> Torr l/s   5 · 10 <sup>-7</sup> mbar l/s
Mains requirement: voltage	200-440 V ±10 %, 50/60 Hz
Processes	Light Duty Applications
Pumping speed, max.	14 m <sup>3</sup> /h
Typical ultimate pressure	0.03 hPa   0.02 Torr   0.03 mbar
Typical ultimate pressure with gas ballast	0.1 hPa   0.07 Torr   0.1 mbar
Version	Standard
Water vapor capacity, max.	80 g/h
Weight	23 kg   50.71 lb

Order number	
ACP 15	V5SATSFTRF

Accessories	
<b>Accessories</b>	
External silencer ES 25 S, DN 25	109873
Inlet particle filter IPF 25, DN 25	111649
Noise reduction cover NRC 15, for ACP 15 pumps	111968
Sound enclosure kit SEK 15, for ACP 15 pumps	112779