

PFEIFFER  VACUUM

 伯東
Hakuto



ACP 28 G






Similar Image

ACP 28, G version, three-phase, purge port R 1/4"

All possible order number combinations are described on the order matrix available in the ACP brochure, please consult it.

Dimensions

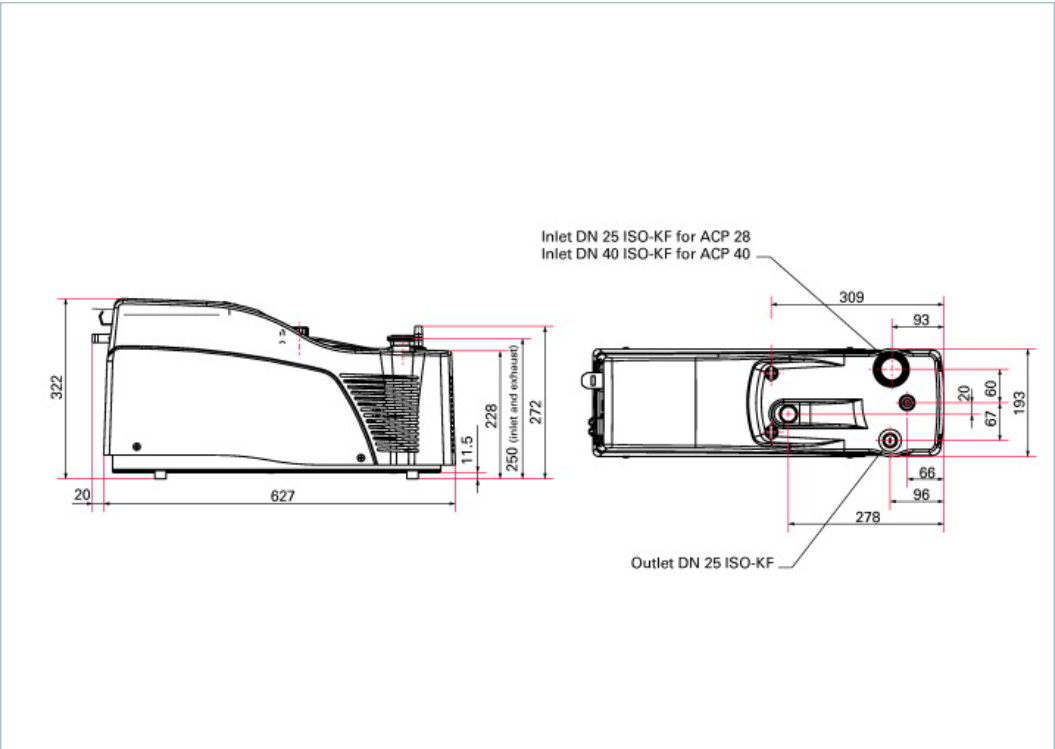

Technical Data	ACP 28, G version, three-phase, purge port R 1/4"
Ambient temperature	12-40 °C 53.6-104 °F 285-313 K
Continuous inlet pressure, max.	1,013 hPa 759.75 Torr 1,013 mbar
Cooling	Air
Corrosive gas version	Yes (light duty)
Dimensions (L x W x H)	612 x 187 x 314 mm 24.09 x 7.36 x 12.36 inch
Flange (in)	DN 25 ISO-KF
Flange (out)	DN 25 ISO-KF
Helium leak rate, max.	5 · 10 ⁻⁸ Pa m ³ /s 3.75 · 10 ⁻⁷ Torr l/s 5 · 10 ⁻⁷ mbar l/s
Mains requirement: voltage	200-440 V ±10 %, 50/60 Hz
N ₂ purge flow, min.	3.7 Slm
Power consumption at ultimate pressure	700 W
Processes	Light Duty Applications
Pumping speed, max.	27 m ³ /h
Typical ultimate pressure	0.03 hPa 0.02 Torr 0.03 mbar
Version	Corrosive gas version
Weight	30 kg 66.14 lb

Order number

ACP 28 G

V6GATSTRBF

Accessories	
Accessories	
External silencer ES 25 S, DN 25	109873
Inlet particle filter IPF 25, DN 25	111649
NRC 28/40, for ACP 28 and ACP 40 pumps	112637
Sound enclosure kit SEK 28/40, for ACP 28 and ACP 40 pumps	114379