


OPERATOR SCREEN

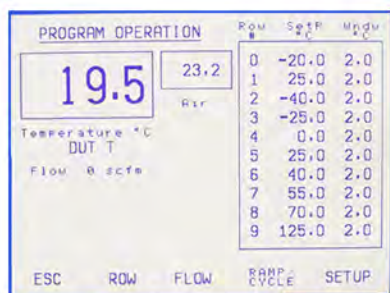

PROGRAM SCREEN

-45° to +225°C

Advanced Temperature Source for fast and precise thermal conditioning of components, parts, hybrids, modules, subassemblies, and printed circuit boards. Capable of ultra-low temperatures **without** the use of Liquid Nitrogen (LN₂) or Liquid Carbon Dioxide (LCO₂).

PERFORMANCE:

Temperature Range*

-45 to +225°C (50/60Hz)

No LN₂ or LCO₂ Required

Transition Rate*

-40 to +125°C, <12 seconds

+125 to -40°C, <40 seconds

System Airflow Output*

4 to 10scfm (1.9 to 4.7 l/s) Continuous

*Under nominal operating conditions.

Transition rates achieved with 20amp system, 10scfm

TEMPERATURE CONTROL:

Temperature Display & Resolution

+/- 0.1°C

Temperature Accuracy

1.0°C (when calibrated against NIST standard)

DUT Temperature Control

proprietary control algorithm enables DUT temperature to be directly controlled

DUT Sensor Ports

thermocouples: type T & K

FEATURES:

► Frost Free Feature

dry air purge for tester interface, prevents condensation: 0.5 to 3scfm (0.25 to 1.5 l/s)

► ECO Friendly Feature

Heat Only Mode

reduces power usage when cold temperatures are not used

► Fully Adjustable Thermal Head

► Local & Remote Operations

► LabView™ drivers

► IEEE-488, RS232 ports

► customizable and savable test setups

► Program & Datalog Storage

► User Defined Temperature Limits

APPLICATION OPTIONS:

► Thermal Cap

5.5 inch ID Glass Thermal Cap to enclose your test subject

► High Performance Air Dryer

(optional) a 20scfm air dryer for drying supply air to <-70°C dewpoint, refer to air dryer data sheet (SL10690) for technical specifications

► System Cart

(optional) a casted, heavy-duty, steel cart for portability and easy mounting of thermal head and operator control module


► Benchmount

(optional) conveniently clamps the thermal head to a benchtop or workstation

Specifications

ATS-515 THERMOSTREAM® Advanced Temperature Source

System Dimensions - with optional cart

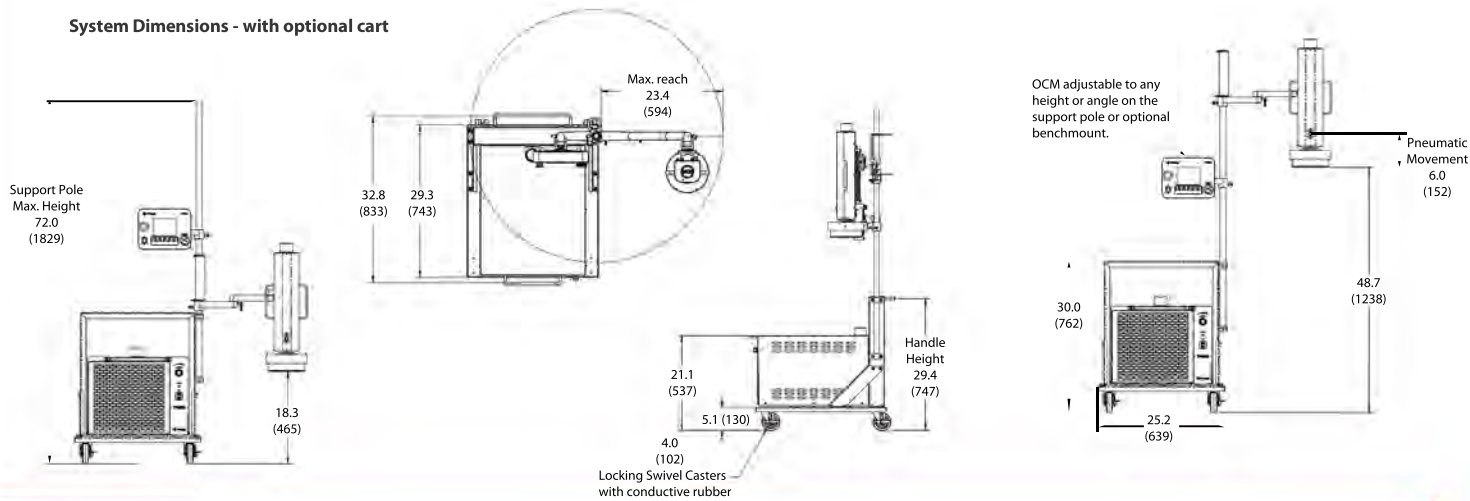

Weights and Dimensions

Dimensions

Controller: 26.7cm (10.5 inches) wide X 20.7cm (8.13 inches) high X 9.8cm (3.8 inches) deep

Chiller: 51.3cm (20.2 inches) wide X 41.4cm (16.3 inches) high X 74.9cm (29.5 inches) deep

Weight

System: 112.0kg (247lbs.)

Chiller: 74.5kg (157lbs)

Chiller with Cart: 100.8kg (215lbs)

Noise Level

<60dBA

Service and Safety

Refrigerants

HCFC and CFC-free, non-toxic, non-flammable

Serviceability

Auto-diagnostics and field replaceable modules

Over Temperature Protection

+230°C (factory set): Operator can set high and low air temperature limits

Facility Requirements

Power²

115 ±10% VAC, 60Hz, 20amp (15amp available)

100 ±10% VAC, 50Hz, 20amp (15amp available)

200 ±10% VAC, 50Hz, 16amp

220 ±10% VAC, 60Hz, 16amp

230 ±10% VAC, 50Hz, 16amp

Compressed Air³

Clean, Dry Air (CDA)

Filtered to 5 micron particulate contamination.

Oil Content: <0.1 ppm, by weight, filtered to

0.01 micron oil contaminant.

Dewpoint: <-70°C @ 6.2 BAR (90PSI)

Air Supply Pressure

5.5 to 7.6 BAR (90 to 110 PSIG)

Total Air Flow Rate Required

5.7 l/s (12 scfm)

2.8 l/s (6scfm) minimum

Air Supply Temperature

+20° to +25°C; +22°C nominal

Operating Environment³

Operating Temperature

+20° to +28°C; +23°C nominal

Humidity

0 to 60%; 45% nominal

² System is configured for operation within voltages listed above. Please specify power configuration with order.

³ Under operating conditions which are greater or less than nominal, performance may be less than specification provided.



中国地区总代理
伯东企业（上海）有限公司
www.hakuto-vacuum.cn
www.hakuto-vacuum.com.tw
Tel: +86-(0)21-5046-3511
Email: ec@hakuto-vacuum.cn

ISO 9001 Certified

