



ASM 390 AND ASM 392

Mobile leak detectors optimized for rapid pump down
and short response times on large test objects.

ASM 390 AND ASM 392



Mobile leak detectors optimized for rapid pump down and short response times on large test objects.

Superior performance, fast testing

The ASM 390 and ASM 392 are the perfect leak detection solutions adapted to the semiconductor and display industries as well as to other demanding applications where rapid pump down and high sensitivity is key. Both models are fully Semi S2 compliant.

These leak detectors are fitted with a dry frictionless backing pump and a powerful high vacuum pump, making them the ideal tools for leak testing of various components in clean environments. Equipped with an additional turbopump, the ASM 392 will speed up your leak detection process to reduce the downtime of your production equipment.

Robust, accurate and reliable

The ASM 390 and ASM 392 were developed to provide full confidence in leak testing regardless of the operator's knowledge. They deliver premium performances and accurate results in a minimal time, making them highly efficient in the field.

Ergonomic and highly maneuverable

ASM 390 and ASM 392 share the same platform and are uniquely ergonomic with a convenient size and height, a secondary handle in the front, a fully rotatable, removable display, an inlet in the front for easy connection to test ports and unrivaled maneuverability for access to all testing areas, even in tight spaces.

Smart and user-friendly

Thanks to a wide, clear color touch display panel, an integrated toolbox with modular compartments and storage space for vacuum bellows, you will be amazed how easy leak detection can be when you have all necessary accessories at the point of use.



Semiconductors



Accelerators



Solar industry




Coating

ASM 390 AND ASM 392



Mobile leak detectors optimized for rapid pump down and short response times on large test objects.

Dimensions

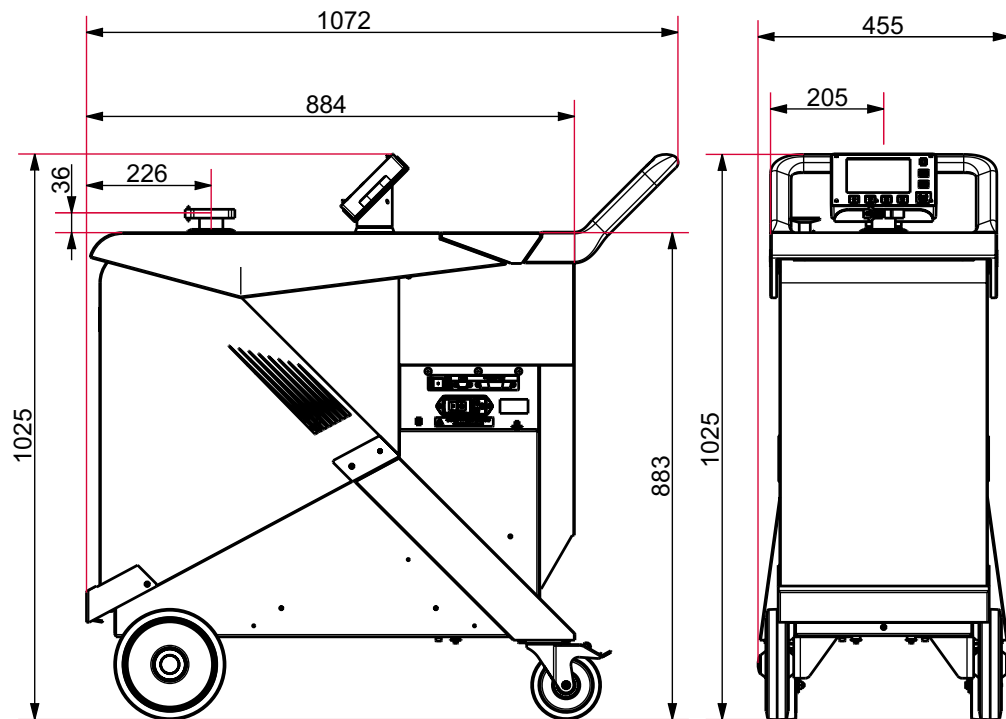

Dimensions in mm

Applications

- Semiconductor industry
- Large area coating
- Solar industry
- Accelerators
- Vacuum components – feedthroughs, valves, bellows, expansion joints
- Laser technology
- Ultra-pure media supply
- Electronics
- Aeronautics
- Medical technology

Technical data

| Features | ASM 390 | ASM 392 |
|---|--|---------|
| Detectable gases | ^4He , ^3He , H_2 | |
| Min. detectable leak rate for Helium (vacuum leak detection) | $1 \cdot 10^{-12}$ mbar l/s | |
| Min. detectable leak rate for Helium (sniffer leak detection) | $1 \cdot 10^{-8}$ mbar l/s | |
| Helium pumping speed | 10 l/s | 25 l/s |
| Backing capacity | 35 m ³ /h | |
| Maximum inlet test pressure | 20 mbar (and additional massive mode) | |
| Start-up time (20°C) without calibration | 2 min | |
| Inlet flange | DN 40 ISO-KF | |
| Response time | < 1 s | |
| Interface | RS-232, I/O, Ethernet (consult operating instructions for more details) | |
| Noise level | ≤ 55 dB (A) | |
| Operating temperature | 10-35 °C | |
| Supply voltage | 100-240 V, 50/60 Hz | |
| Power consumption | 800 W | |
| Power consumption max. | 1,600 W | |
| Weight | 125 kg | 130 kg |
| Dimensions (LxWxH) | 1,072 x 455 x 1,025 mm | |

Order number matrix ASM 390/392

Order number

a G b M M 9 c

| Version | a |
|--------------------------------------|---------------|
| ASM 390 | CSGB01 |
| ASM 392 | ESGB02 |
| Interface board | b |
| Basic 15 pins I/O | 0 |
| 37 pins I/O | 2 |
| 37 pins I/O + Ethernet ¹⁾ | 4 |
| Customization on exhaust | c |
| None (Standard) | A |
| Exhaust DN 25 | B |
| Exhaust DN 40 | C |

Accessories

| Accessorie | Order number |
|---|-------------------|
| Bottle holder for ASM 390 and ASM 392 | 126561 |
| Remote control | |
| RC10 (wired/wireless operation, color touch screen) | 124193 |
| Basic with 5 m cable | 106688 |
| Locking clamp DN 40 KF | 118801 |
| Standard sniffer probe ²⁾ | |
| 5 m hose length, rigid 9 cm nozzle | SNC1E1T1 |
| External communication box ECB-Wifi | 125902 |
| Helium spray gun | |
| Standard | 112535 |
| Spray gun "Elite" with accessories in a case | 109951 |
| Inlet filters for dust ²⁾ | |
| Brass, 20 µm, DN 40/40 ISO-KF | 105842 |
| Stainless steel, 15 µm, DN 40/40 ISO-KF | on request |

¹⁾ Ethernet will allow to create an additional COM port to operate the leak detector through a computer

²⁾ Other configurations available, please contact your local Pfeiffer Vacuum support



Customer benefits

- High maneuverability and compact design
- Superior leak testing performances
- Large rotateable color touch screen
- High roughing capacity (35 m³/h) for fast evacuation
- Dry and clean pumping technology
- Low maintenance requirements
- Ergonomic design with working surface
- Fast recovery in case of pollution
- Intuitive menu for easy operation
- Integrated toolbox for storage of accessories
- Fast start-up
- High sensitivity and accurate measurements
- Fully Semi S2 compliant

上海伯东真空产品事业部

上海伯东--您理想的真空合作伙伴！

伯东公司成立于 1953 年，全球范围内有一千七百名员工。伯东企业(上海)有限公司(www.hakuto-vacuum.cn)主要从事半导体设备、电子零部件加工、销售及相关服务工作，集团年营业额约为 100 亿人民币。伯东公司在国内主要城市：北京、苏州、广州、深圳、成都及厦门设有营业据点。

上海伯东真空产品事业部秉承为广大中国客户提供世界一流的真空产品、推动中国真空工艺发展、承担企业社会责任为经营理念，已累计为超过 10,000 家企业提供真空服务，覆盖工业、半导体、镀膜、科研和分析行业。

上海伯东代理品牌包含：德国 Pfeiffer 全系列真空产品、美国 KRI 离子源、美国 Brooks Polycold 制冷机，美国 HVA 真空阀门，美国 inTEST (Temptronic) 高速温度循环测试机，离子蚀刻机，真空镀膜系统及配套真空零配件等。

上海伯东作为国际知名真空品牌指定授权代理商，全权负责在中国地区的销售和维修服务，100% 使用原厂进口零部件以及国外受训维修工程师；拥有完全的拆解，维修，校正能力并提供 24 小时在线服务。



● 营业维修服务据点



伯东企业（上海）有限公司 HAKUTO ENTERPRISES (SHANGHAI) LTD.

TEL: (86) 21-5046-3511

FAX: (86) 21-5046-1490

MOL: 1391-883-7267

伯东企业（上海）有限公司 销售及售后服务中心

上海市外高桥保税区希雅路 33 号 17#3 楼 B 座

电 话：+86-21-5046-3511

传 真：+86-21-5046-1490

官 网：<http://www.hakuto-vacuum.cn>

24 h 售后维修专线：1381-880-1372

伯东企业（上海）有限公司 北京办事处 销售中心

北京丰台区芳群园四区 22 号楼金城中心 705 室

电 话：+86-010-8768-4988

传 真：+86-21-5046-1490

官 网：<http://www.hakuto-vacuum.cn>

伯东企业（上海）有限公司 深圳办事处 销售中心

深圳市罗湖区宝安南路 1036 号鼎丰大厦 501

电 话：+86-0755-2547-3988.643

传 真：+86-21-5046-1490

官 网：<http://www.hakuto-vacuum.cn>

伯东国际通商股份有限公司 销售及售后服务中心

台北市中山区八德路二段 308 号 6 楼

电 话：+886-2-8772-8910

传 真：+886-2-8772-8918

新竹市埔顶路 25 号 8 楼之一

电 话：+886-3-5679508

传 真：+886-3-5670049

官 网：<http://www.hakuto-vacuum.com.tw>

