



Duo 6/M

Dual-stage rotary vane pumps with a pumping speed up to 6 m³/h:





Similar Image


Duo 6, 1-phase motor, 230-240 V, 50/60 Hz

- Dual-stage, high-performance rotary vane pump with a pumping speed of 5 m³/h at 50 Hz / 6 m³/h at 60 Hz
- With single-phase motor with C14 connector plug inside the terminal box
- Integrated gas ballast and HV safety valve
- For all low and medium vacuum applications
- Optional with magnetic coupling
- Other motor voltages available on request

M = Magnetically coupled

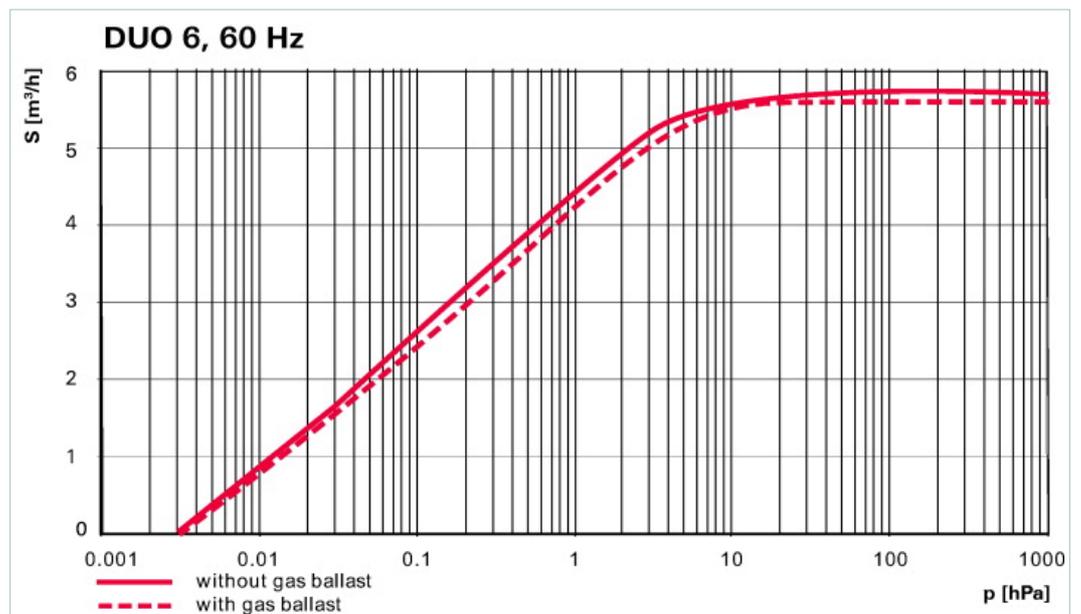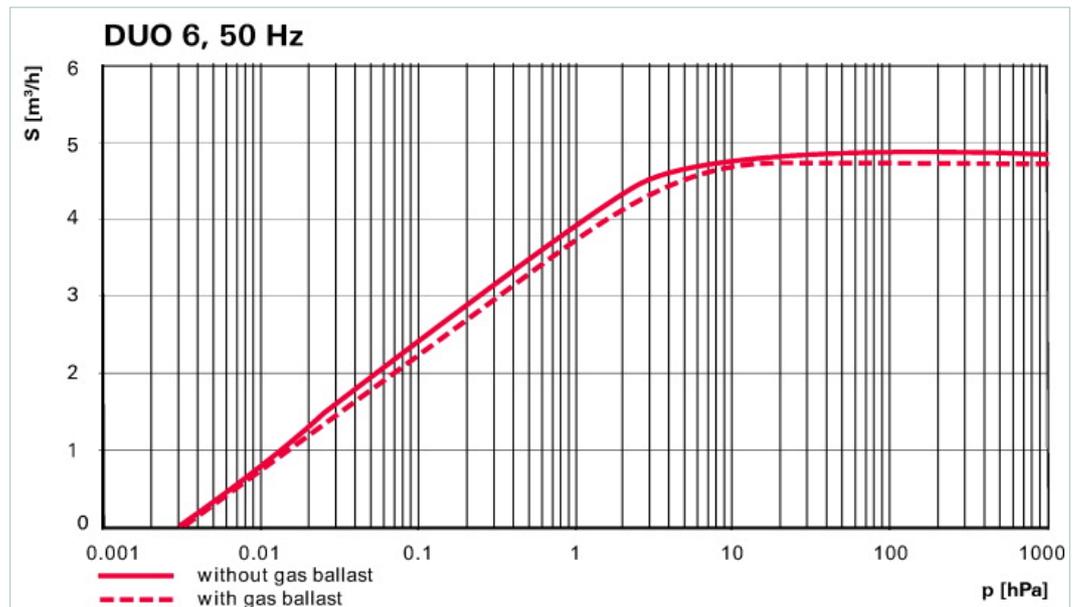

Dimensions

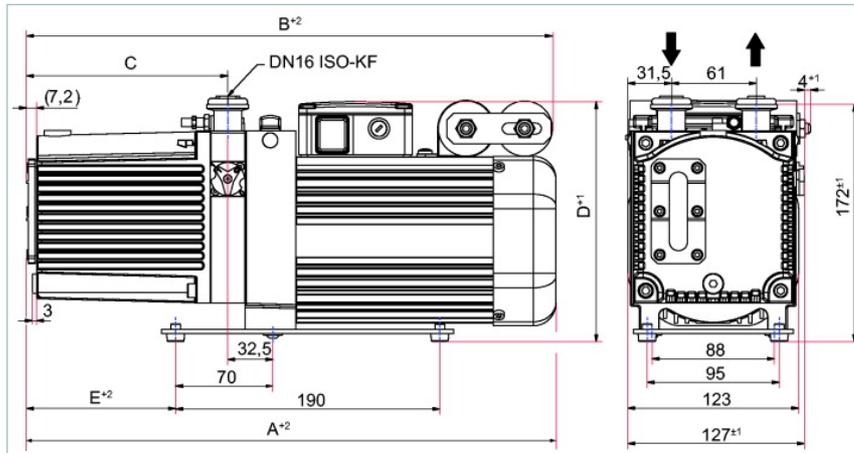

A	371 mm
B	371 mm
C	145 mm
D	177 mm
E	107.5 mm

Technical Data	Duo 6, 1-phase motor, 230-240 V, 50/60 Hz
Ambient temperature	12-40 °C 53.6-104 °F 285-313 K
Cooling method, standard	Air
Emission sound pressure level without gas ballast at 50 Hz	51 ± 2 dB (A)
Exhaust pressure, max.	1,500 hPa 1,125 Torr 1,500 mbar
Exhaust pressure, min.	250 hPa 187.5 Torr 250 mbar
Flange (in)	DN 16 ISO-KF
Flange (out)	DN 16 ISO-KF
Leak rate safety valve	$\leq 1 \cdot 10^{-5}$ Pa m ³ /s $\leq 7.5 \cdot 10^{-5}$ Torr l/s $\leq 1 \cdot 10^{-4}$ mbar l/s
Mains requirement: voltage 50 Hz	230-240 V
Mains requirement: voltage 60 Hz	230-240 V
Motor version	1-phase Motor
Operating fluid	P3
Operating fluid filling	0.5 l
Protection category	IP 40
Pumping speed at 50 Hz	5 m ³ /h
Pumping speed at 60 Hz	6 m ³ /h
Rated power 50 Hz	0.2 kW
Rated power 60 Hz	0.24 kW
Rotation speed at 50 Hz	3000 min ⁻¹
Rotation speed at 60 Hz	3600 min ⁻¹
Switch	yes
Ultimate pressure with gas ballast	$\leq 3 \cdot 10^{-2}$ hPa $\leq 2.25 \cdot 10^{-2}$ Torr $\leq 3 \cdot 10^{-2}$ mbar
Ultimate pressure without gas ballast	$\leq 3 \cdot 10^{-3}$ hPa $\leq 2.25 \cdot 10^{-3}$ Torr $\leq 3 \cdot 10^{-3}$ mbar
Weight	16 kg 35.27 lb

Typical ultimate pressure according to PNEUROP

Order number

Duo 6/M

PK D58 712

Accessories	
Accessories	
Oil return unit from ONF 16 M to Duo 1.6, 3, 6, 11	PK 006 080 -T
Oil return unit from ONF 16 S to Duo 1.6 / Duo 3	PK 005 986 -T
Accessories UnoLine	
KAS 16, condensate separator for pumping speeds from 1.6 to 12 m ³ /h	PK Z10 003
Mains cable 115 / 230 V without plug, right angle IEC 320/C13 socket, 3 m	PK 050 111
Mains cable 115 V with NEMA-plug, right angle IEC 320/C13 socket, 2 m	PK 050 110
Mains cable 230 V with safety plug CEE 7, right angle IEC 320/C13 socket, 2 m	PK 050 109
ONF 16 M, oil mist filter for pumping speeds of up to 12 m ³ /h	PK Z40 003
ONF 16 S, oil mist filter for pumping speeds up to 12 m ³ /h	PK Z40 001
Operations monitoring unit 1 for Duo 1.6/3/6/11 and Duo 5/10/20 M	PK 196 157 -T
Operations monitoring unit 2 for Duo 1.6/3/6/11 and Duo 5/10/20 M	PK 196 142 -T
Operations monitoring unit 3 for Duo 1.6/3/6/11 and Duo 5/10/20 M	PK 196 141 -T
SAS 16, DN 16 ISO-KF, polyester filter	PK Z60 506
ZFO 16, zeolite trap	PK Z70 003
Consumables	
P3, mineral oil, 1 l	PK 001 106 -T
P3, mineral oil, 0.5 l	PK 001 136 -T

VACUUM SOLUTIONS FROM A SINGLE SOURCE

Pfeiffer Vacuum stands for innovative and custom vacuum solutions worldwide, technological perfection, competent advice and reliable service.

COMPLETE RANGE OF PRODUCTS

From a single component to complex systems:

We are the only supplier of vacuum technology that provides a complete product portfolio.

COMPETENCE IN THEORY AND PRACTICE

Benefit from our know-how and our portfolio of training opportunities!

We support you with your plant layout and provide first-class on-site service worldwide.

Are you looking for a
perfect vacuum solution?
Please contact us:

Pfeiffer Vacuum GmbH
Headquarters · Germany
T +49 6441 802-0
info@pfeiffer-vacuum.de

www.pfeiffer-vacuum.com

All data subject to change without prior notice.

PFEIFFER  **VACUUM**